(54) Title: NUMERICALLY CONTROLLED OSCILLATOR AND DIGITAL PHASE LOCKED LOOP
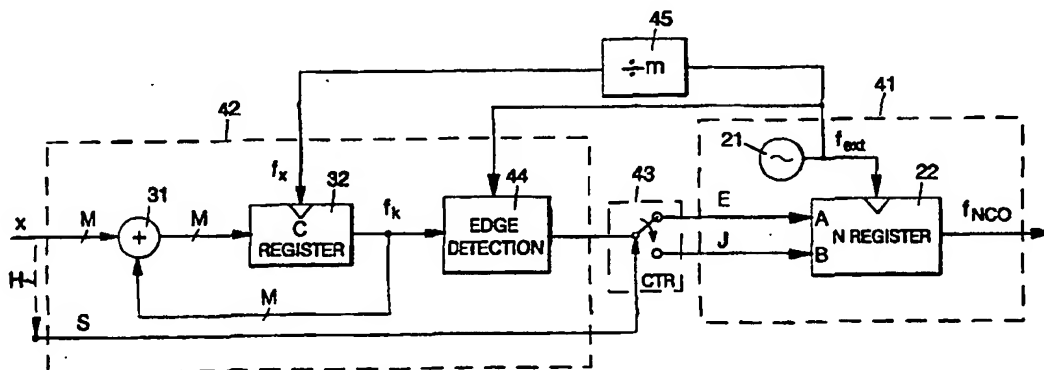
(57) Abstract

The invention relates to a numerically controlled oscillator comprising a first oscillator section (41) having a counter (22) acting as a frequency divider, and an external oscillator (21) supplying a clock signal (f_{ext}) connected to the counter (22) for generating an output signal (f_{NCO}) with a divided frequency from said clock signal, the counter (22) comprising at least one phase control input (A, B) for connecting phase correction requests to the counter (22) for adjusting the phase of said output signal (f_{NCO}) in a desired direction. In order that the gain factor of the oscillator could be diminished and the oscillator could be connected to a digital filter, a second accumulator-type oscillator section (42) known per se is connected to control the first oscillator section (41), the second oscillator section comprising an adder (31) and a register (32), to which the output of the adder is connected, the adder (31) having a first input for connecting a binary digit (x) to control said second oscillator section (42), and a second input for feeding the output signal of the register back to the adder (31). The invention also relates to a phase-locked loop utilizing a numerically controlled oscillator.

1

Numerically controlled oscillator and digital phase
locked loop

The invention relates to a numerically con-
trolled oscillator according to the preamble of the
attached claim 1, and to a digital phase-locked loop
according to the preamble of the attached claim 4,
comprising a numerically controlled oscillator.

.Figure 1 shows a digital phase-locked loop
(DPLL) 10 known *per se* in its general form, in which
it comprises a phase comparator 13, a lowpass-type
loop filter 14 having an input to which the output
signal of the phase comparator is connected, and a
numerically controlled oscillator 15 arranged to be
controlled by the loop filter. A signal is applied to
each one of inputs I1 and I2 of the phase comparator
through a frequency divider 11 and 12, respectively. A
reference signal f_{ref} is applied to the frequency
divider 11, which divides the frequency of the refer-
ence signal by an integer p, whereby a signal having a
frequency f_{ref}/p (in this text the reference f refers
both to the signal and to its frequency) is applied to
the first input I1 in the phase comparator 13. The
function of the numerically controlled oscillator 15
is to generate a wide range of frequencies from an
external clock signal f_{ext} having a frequency higher
than that of the output signal f_{NCO} of the oscillator.
The output signal of the oscillator is applied through
the frequency divider 12 back to the second input I2
of the phase comparator 13. The phase comparator thus
compares the phase of a signal having the frequency
f_{ref}/p with the phase of a signal having the frequency
f_{NCO}/q. The result of this comparison is lowpass-
filtered in the loop filter 14, and the filtered
signal is applied to the oscillator 15 to control it.

2

When the loop is locked, Formula (1) is valid for the
output signal of the loop:

$$(1) \quad f_{NCO} = \frac{q}{p} f_{ref}$$

5

i.e. the frequency of the output signal is the fre-
quency of the reference signal multiplied by the
number q/p.

In prior art solutions, the numerically con-
10   trolled oscillator 15 of the digital phase-locked loop
is typically implemented in two different ways: either
based on a counter or based on an accumulator.

Figure 2 illustrates an implementation of the
numerically controlled oscillator 15 based on a
15   counter. In this case, the implementation is based on
a counter 22 which divides with a divisor N and the
change of state of which is controlled by an accurate
clock signal f_{ext} fed from an external oscillator 21
and by a "lead" signal E and a "lag" signal J received
20   as control data from the loop filter and connected to
a counter input A and B, respectively, according to
the concerned signal. The counter 22 is implemented by
an N-state state machine having the above-mentioned
signals E and J as its control signals. When the
25   "lead" signal E is true, the state machine steps in
place during one clock period, whereby the phase of
the output signal f_{NCO} is delayed by one clock period
of the clock signal f_{ext} of the external oscillator.
When the "lag" signal J is true, the state machine
30   skips one state, whereby the phase of the output
signal f_{NCO} is advanced by one clock period of the
clock signal f_{ext} of the external oscillator. Accord-
ingly, the length of the phase correction step is
always the period length of the output signal f_{NCO}
35   divided with the divisor N.

3

A drawback of the solution based on the N-counter is that the counter cannot be connected e.g. to a digital filter but it requires a filter of a certain type, such as a so-called lead-lag filter. The digital filter, however, would be a better alternative, as it provides a filter with a narrower bandwidth and, more generally, better properties than the simpler lead-lag filter, for instance.

Figure 3 illustrates an implementation of an accumulator-type numerically controlled oscillator. In this case the oscillator comprises an adder 31 and a register 32, to which the output of the adder is connected. The input signal of the accumulator-type oscillator is a binary (N-bit) digit x applied to a first input in the adder and indicating the magnitude and direction of the required phase correction. The binary digit is obtained from a digital loop filter, and it varies as a function of time in accordance with the filtering result. An output signal f_{NCO} is generated by continuously adding binary digits x to the previous value of the register at the frequency of the external clock signal f_{ext}, which clock signal is connected to a clock input C in the register. At the rising edge of the external clock signal the N-bit value of the output signal y of the adder is stored in the register 32, the value of which indicates the current phase of the output signal. The output signal f_{NCO} of the oscillator is formed by the most significant bit of the register.

The N-bit accumulator-type numerically controlled oscillator generates a frequency obtained from the frequency of the external oscillator in accordance with Formula (2)

4

$$(2) \quad f_{NCO} = \frac{x}{2^N} \cdot f_{ext}$$

The word width N of the register of the accu-
mulator-type numerically controlled oscillator affects
both the gain factor of the oscillator and the highest
frequency that can be generated. In order that a
relatively low gain factor could be achieved, the word
width has to be great; on the other hand, a great word
width also increases the length of the adder and thus
also the propagation delay of the adder. The accumul-
ator-type numerically controlled oscillator can
operate only if the length of the period of the
external clock signal ($1/f_{ext}$) exceeds the delay of the
adder. For this reason, it is impossible in many
applications to achieve a gain factor low enough. The
achievement of a low gain factor, however, is
important in order that the phase-locked loop could
have a narrow bandwidth.

According to a definition known *per se*, the gain
factor K_o of the accumulator-type numerically con-
trolled oscillator is the ratio of a change in an
angular frequency applied to the phase comparator to a
change Δx in a binary digit x controlling the oscil-
lator:

$$(3) \quad K_o = \frac{\frac{\Delta x}{2^N} \times \frac{2\pi f_{ext}}{q}}{\Delta x} = \frac{2\pi f_{ext}}{2^N q}$$

In the above Formula (3) a constant q is the
divisor of the frequency divider (possibly) provided
between the output of the oscillator and the second
input of the phase comparator (cf. Figure 1).

5

Another drawback of the accumulator-type oscil-
lator is that the gain factor cannot be set with any
particularly high accuracy (it can be set by varying
the word width N).

5   The digital phase-locked loop and the accumu-
lator-type numerically controlled oscillator are
described e.g. in *Digital Phase-Locked Loop with
Jitter Bounded,* Walters, S. M., Troudet T., IEEE
Transactions on Circuits and Systems, Vol. 36, No. 7,
10   July 1989, which is referred to for a more detailed
discussion.

The object of the present invention is to avoid
the above-described drawbacks and to provide a
numerically controlled oscillator which has a gain
15   factor which both can be made low and can be set more
accurately than previously and which can also be con-
nected to a digital filter. These objects are achieved
by an oscillator according to the invention, which is
characterized by what is disclosed in the character-
20   izing portion of the attached claim 1. The phase-
locked loop according to the invention, in turn, is
characterized by what is disclosed in the charac-
terizing portion of the attached claim 4.

The idea of the invention is to combine the
25   previously known implementations of the numerically
controlled oscillator in such a way that the frequency
of the phase correction requests of an oscillator
section based on a counter is controlled by an accumu-
lator-type oscillator section.

30   In the following the invention and its preferred
embodiments will be described more fully with refer-
ence to Figure 4 in the examples shown in the attached
drawings, where

Figure 1 is a block diagram illustrating a
35   digital phase-locked loop known *per se;*

6

Figure 2 shows one previously known implementation of the numerically controlled oscillator of the digital phase-locked loop;

Figure 3 shows another previously known implementation of the numerically controlled oscillator of the digital phase-locked loop; and

Figure 4 shows an implementation according to the invention of the numerically controlled oscillator of the digital phase-locked loop.

Figure 4 is a block diagram illustrating a numerically controlled oscillator implemented according to the invention. The oscillator comprises a first numerically controlled oscillator section 41, which corresponds to the above-described counter-based oscillator implementation shown in Figure 2, where the change of state of a counter 22 is controlled by an accurate clock signal f_{ext} from an external oscillator 21 and by a "lead" signal E and a "lag" signal J, respectively, received as control data. A second numerically controlled oscillator section 42 is connected to control the first oscillator section. The second oscillator section is based on the accumulator-type oscillator shown in Figure 3, comprising an adder 31 and a register 32, to which the output of the adder is connected and the output of which is fed back to one input in the adder. As the first oscillator section 41 corresponds to the counter-based oscillator, and the second oscillator section 42 corresponds substantially to the accumulator-type oscillator, the same reference numerals as in Figures 2 and 3 have been used in Figure 4 for corresponding parts.

The idea of the invention is to adjust the frequency of the phase correction requests (signals E and J) of the counter-based oscillator section 41 by the accumulator-type oscillator section 42, that is,

7

in fact, by a binary digit x, as the accumulator-type oscillator is controlled by a binary digit, and addi-tionally by a signal S indicating the direction of the phase correction. To effect the control, phase control
5   inputs A and B in the first oscillator section are connected to respective outputs in a selector 43, and a selector input is connected to an output in the second oscillator section. The selector is controlled by the direction signal S, which is connected to a
10   control input CTR in the selector. The direction signal S determines whether the output of the second oscillator section 42 is connected to the input A in the first oscillator section, corresponding to the "lead" signal, or to the input B in the first oscil-
15   lator section, corresponding to the "lag" signal.

The second oscillator section 42 corresponds otherwise to the accumulator-type oscillator shown in Figure 3 except that the output signal of the register 32, now indicated with the reference f_k, is connected
20   to an edge detector circuit 44, the output of which forms an output in the second oscillator section 42, which output is connected to an input in the selector 43. The edge detector circuit detects the rising edges of the output signal f_k and shapes the signal such
25   that its pulse width corresponds to the pulse width of the external clock signal f_{ext} (which controls the N counter 22).

A signal obtained from the register 32 of the second oscillator section thus has a frequency which
30   can be obtained as follows:

$$(4) \quad f_k = \frac{x}{2^M} f_x$$

8

This frequency is also the frequency of pulses from the output of the edge detector circuit, that is, a signal having this frequency either advances or delays the phase of the counter 22 of the first oscillator section. The frequency of the numerically controlled oscillator according to the invention can now be calculated from Formula (5):

$$(5) \quad f_{NCO} = \frac{f_{ext}}{N} \pm \frac{x\ f_x}{2^M\ N}$$

In Formula (5), the sign of the $\pm$ operation depends on the sign of the phase correction signal S. On the basis of Formula (5), it is possible to calculate the gain factor of the numerically controlled oscillator shown in Figure 4, which factor, according to a definition known *per se*, is the ratio of a change in an angular frequency applied to the phase comparator of the phase-locked loop to a change in the controlling binary digit x. The gain factor will thus be:

$$(6) \quad K_o = \frac{\dfrac{2\pi \Delta f_{NCO}}{q}}{\Delta x} = \frac{2\pi \dfrac{\Delta x f_x}{2^M\ N}}{\Delta x\ q} = \frac{2\pi f_x}{2^M\ N\ q}$$

where a constant q is the divisor of a frequency divider (possibly) provided between the output of the oscillator and the input of the phase comparator in the feedback loop of the phase-locked signal.

It appears from Formula (6) that a low gain factor is easy to achieve in the oscillator according to the invention by setting the frequency of the signal f_x to a low value, whereby the value of the

9

gain factor also diminishes. The signal f_x controlling
storing into the register 32 is, in fact, advanta-
geously obtained by dividing the frequency of the
signal f_{ext} from the external oscillator 21 of the
5   first oscillator section 41 by a divisor m in a fre-
quency divider 45. The frequency of the signal f_x is
thus considerably lower than that of the signal f_{ext}.

The numerically controlled oscillator shown in
Figure 4 can be connected to a digital loop filter, as
10   the desired control signals x and S are obtained
directly from the digital filter, or the output signal
of the digital filter is at least easy to shape so
that the desired control signals are obtained. The
direction signal S, for instance, may be contained in
15   a binary word x obtained from the loop filter, and it
can be extracted from the binary word into a separate
control signal, which is connected, as described
above, to control the selector 43. (In Figure 4, this
alternative is shown by an arrow H drawn by a broken
20   line).

Even though the invention has been described
above with reference to the examples of the attached
drawings, it is self-evident that the invention is not
limited to the examples, but it may be modified within
25   the inventive idea disclosed above and in the attached
claims. For instance, the more detailed switching
arrangements of the oscillator and the phase-locked
loop may vary, even though the accumulator-type oscil-
lator section is connected to control the counter-type
30   oscillator section in accordance with the idea of the
invention. Essential is that the accumulator-type
oscillator section controls the counter-type oscil-
lator section, whereas it is not essential in which
way it is connected to control the counter-type oscil-
35   lator section, i.e. whether it is connected to the

10

counter-type oscillator section directly or through various intermediate circuits irrelevant to the idea of the invention. The solution according to the invention is not only applicable in all digital phase locks 5 where the oscillator is controlled by a binary word but, in principle, it is also possible to use the invention in other applications where a similar control is available.

11

Claims:

1. Numerically controlled oscillator comprising
a first oscillator section (41) having a counter (22)
acting as a frequency divider and an external oscil-
lator (21) supplying a clock signal (f_{ext}) connected to
the counter (22) for generating an output signal (f_{NCO})
with a divided frequency from said clock signal, the
counter (22) comprising at least one phase control
input (A, B) for connecting phase correction requests
to the counter (22) for adjusting the phase of said
output signal (f_{NCO}) in a desired direction, c h a r-
a c t e r i z e d in that a second accumulator-type
oscillator section (42) known *per se* is connected to
control the phase of the output signal (f_{NCO}) of the
first oscillator section (41), the second oscillator
section comprising an adder (31) and a register (32),
to which the output of the adder is connected, the
adder (31) having a first input for connecting a
binary digit (x) to control said second oscillator
section (42), and a second input for feeding the
output signal of the register back to the adder (31).

2. Oscillator according to claim 1, comprising
two phase control inputs (A, B), c h a r a c t e r-
i z e d in that said accumulator-type oscillator
section (42) is operationally connected to one of the
phase control inputs through a selector (43), which
comprises means for connecting a signal present at its
input to a desired output.

3. Oscillator according to claim 1, c h a r a c-
t e r i z e d in that a clock input (C) in said
register (32), to which a clock signal (f_x) is con-
nectable to control storing into the register, is
connected to said external oscillator (21) through a
frequency divider (45) for dividing the frequency of

12

the signal (f_{ext}) from the external oscillator (21) before connecting it to the clock input (C) in the register.

4. Phase-locked loop comprising

5   - a phase comparator (13) having at least two comparator inputs for comparing the phases of signals connected to the inputs;

       - a lowpass-type loop filter (14) having an input to which the output of the phase comparator is
10   connected; and

       - a numerically controlled oscillator (15) arranged to be controlled by the loop filter (14) and comprising a first oscillator section (41) having a counter (22) acting as a frequency divider and an
15   external oscillator (21) supplying a clock signal (f_{ext}) connected to the counter (22) for generating an output signal (f_{NCO}) with a divided frequency from said clock signal, the counter (22) comprising at least one phase control input (A, B) for connecting phase cor-
20   rection requests to the counter (22) for adjusting the phase of said output signal (f_{NCO}) in a desired direction, c h a r a c t e r i z e d in that a second accumulator-type oscillator section (42) known *per se* is connected to control the phase of the output signal
25   (f_{NCO}) of the first oscillator section (41), the second oscillator section comprising an adder (31) and a register (32), to which the output of the adder is connected, the adder (31) having a first input con- nected operationally to the loop filter (14) for con-
30   necting the loop filter to control said second oscil- lator section (42), and a second input for feeding the output signal of the register back to the adder (31).

       5. Phase-locked loop according to claim 4, comprising two phase control inputs (A, B), c h a r -
35   a c t e r i z e d   in that said accumulator-type

oscillator section (42) is operationally connected to one of the phase control inputs through a selector (43), which comprises a control input (CTR) operationally connected to the loop filter (14) for con-
5   necting the loop filter to control the switching of a signal present at the selector input to a desired selector output.

6.   Phase-locked loop according to claim 4, c h a r a c t e r i z e d   in that a clock input (C)
10 in said register (32), to which a clock signal (f_x) is connectable to control storing into the register, is connected to said external oscillator (21) through a frequency divider (45) for dividing the frequency of the signal (f_{ext}) from the external oscillator (21)
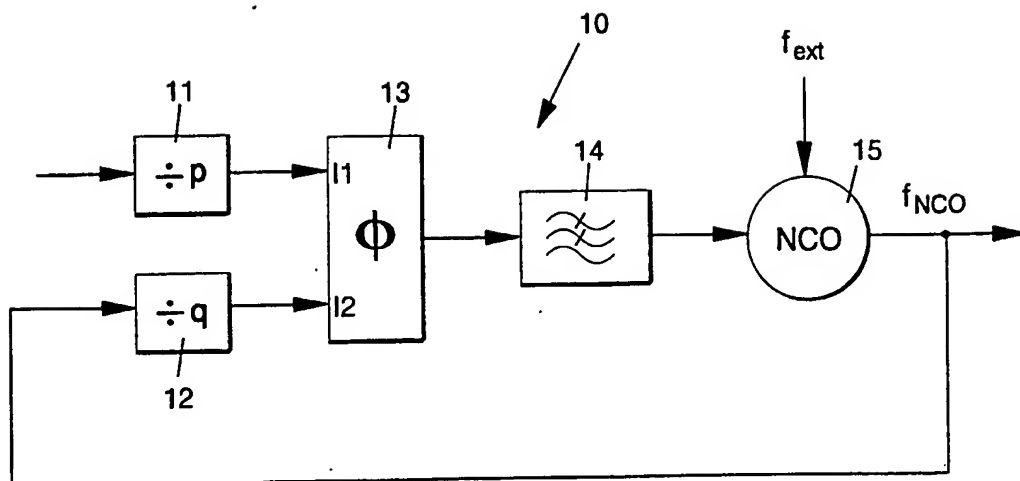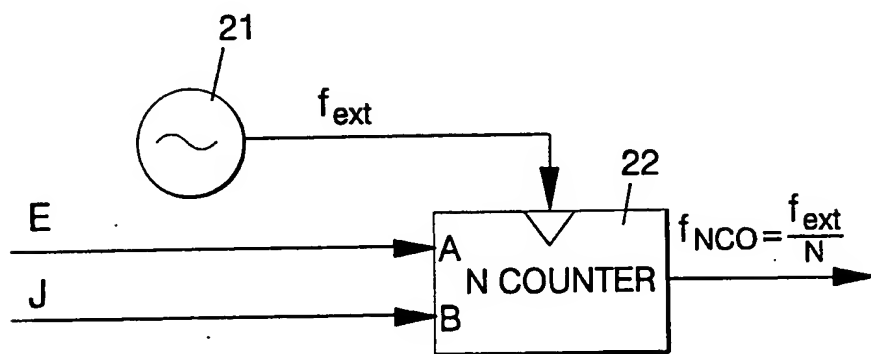15 before connecting it to the clock input (C) in the register.
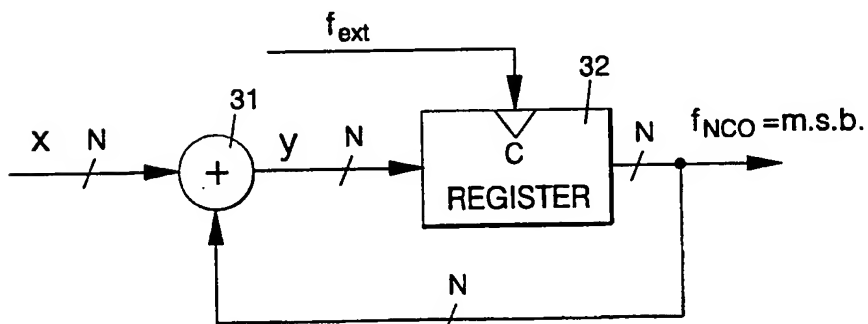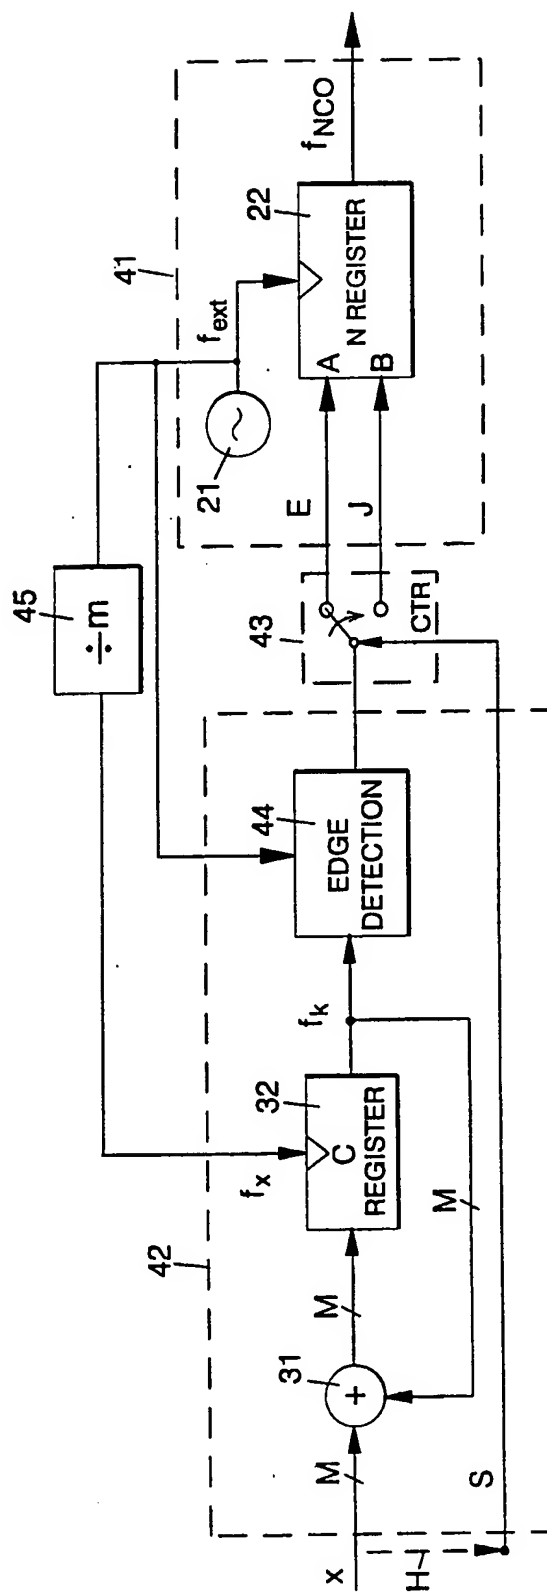
FIG. 1

FIG. 2

FIG. 3

FIG. 4

INTERNATIONAL SEARCH REPORT

	International application No.
	PCT/FI 94/00167

A. CLASSIFICATION OF SUBJECT MATTER

IPC : H03L 7/099, H03L 7/18
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC : H03L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CA, A, 1161910 (MULTI-DIMENSION LTD), 7 February 1984 (07.02.84), page 5, line 6 - page 7, line 32, figures 1,3	1-6
A	EP, A2, 0388313 (JOHN FLUKE MFG. CO., INC.), 19 Sept 1990 (19.09.90), page 4, line 35 - page 6, line 39, figures 2,3	1-6
A	EP, A1, 0459446 (SONY CORPORATION), 4 December 1991 (04.12.91), see the whole document	1-6

☐ Further documents are listed in the continuation of Box C.   ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	
"E" erlier document but published on or after the international filing date	"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
9 August 1994	1 1 -08- 1994
Name and mailing address of the ISA/	Authorized officer
Swedish Patent Office Box 5055, S-102 42 STOCKHOLM	Bo Gustavsson
Facsimile No. +46 8 666 02 86	Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
CA-A- 1161910	07/02/84	NONE		
EP-A2- 0388313	19/09/90	JP-A- US-A-	2280415 4951004	16/11/90 21/08/90
EP-A1- 0459446	04/12/91	JP-A- US-A-	4037205 5153526	07/02/92 06/10/92